REPEATABILITY OF SKIP SIGNAL : 0.001mm

OPERATING SPEED 5m/min.MAX.
50~200mm/min.RECOMMENDED.


CONTACT RATING : DC12~24V 10mA(RECOMMENDED)
(Max.20mA) NON-INDUCTIVE LOAD


DEGREES OF PROTECTION : IEC IP67

PARALLELISM BETWEEN FACE A AND C 0.01/5

PERPENDICULARITY BETWEEN FACE A AND B,D 0.01/5

PERPENDICULARITY BETWEEN FACE E AND A,B,C,D 0.05/5

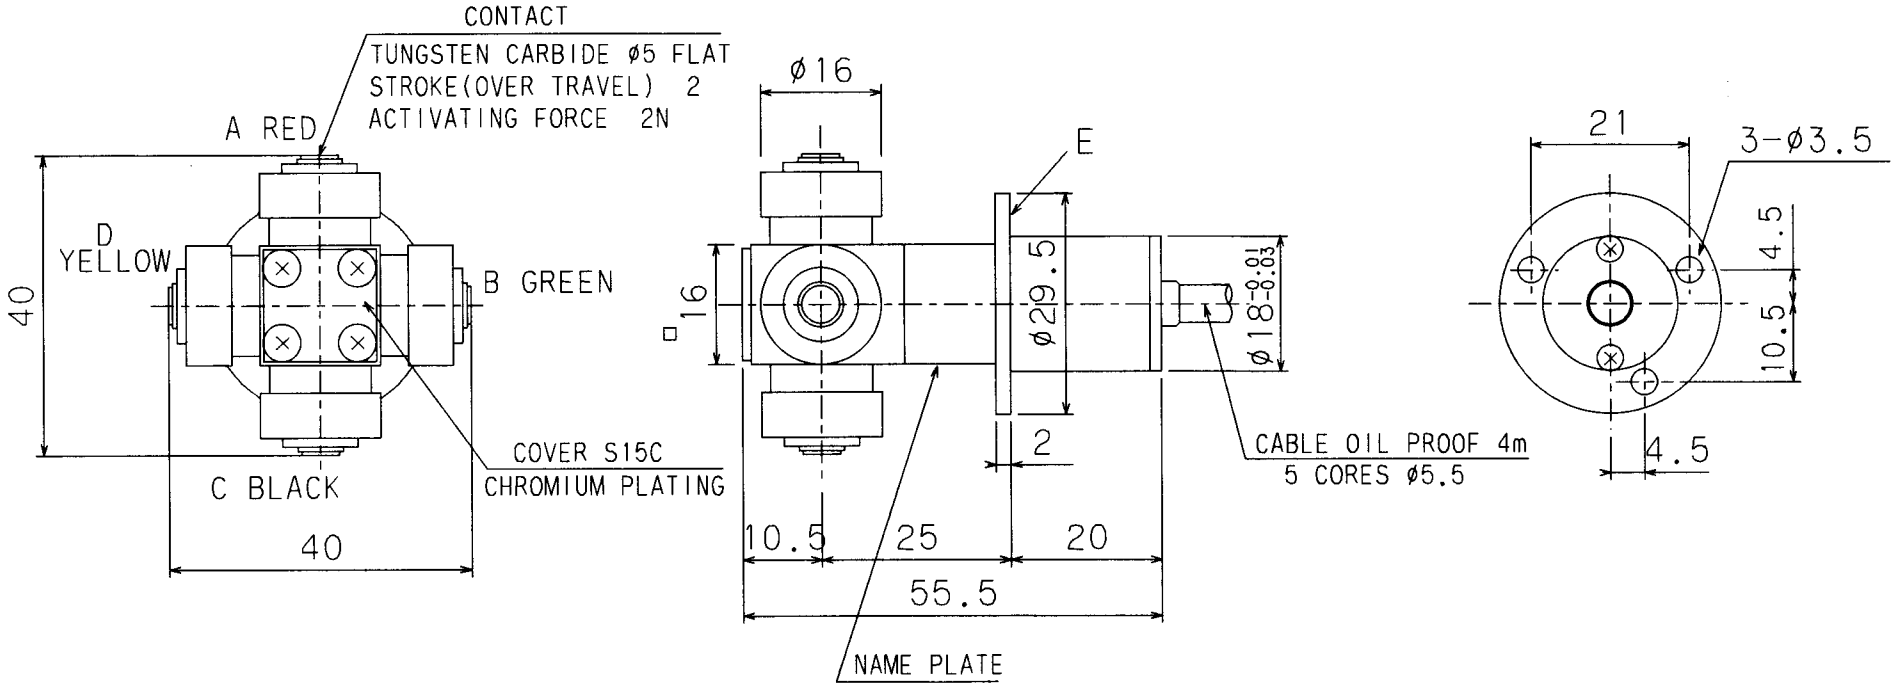

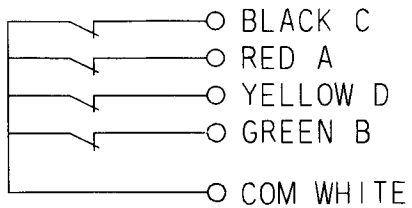

APR	CHK	DRA
	K.EBINA	01.10.24 HIJIKATA

	NAME	TOOL SETTING PROBE
	DRAWING NUMBER	H4A-04-07
1/1	METROL LTD.	METROL

¥H4A12¥4A0407E