
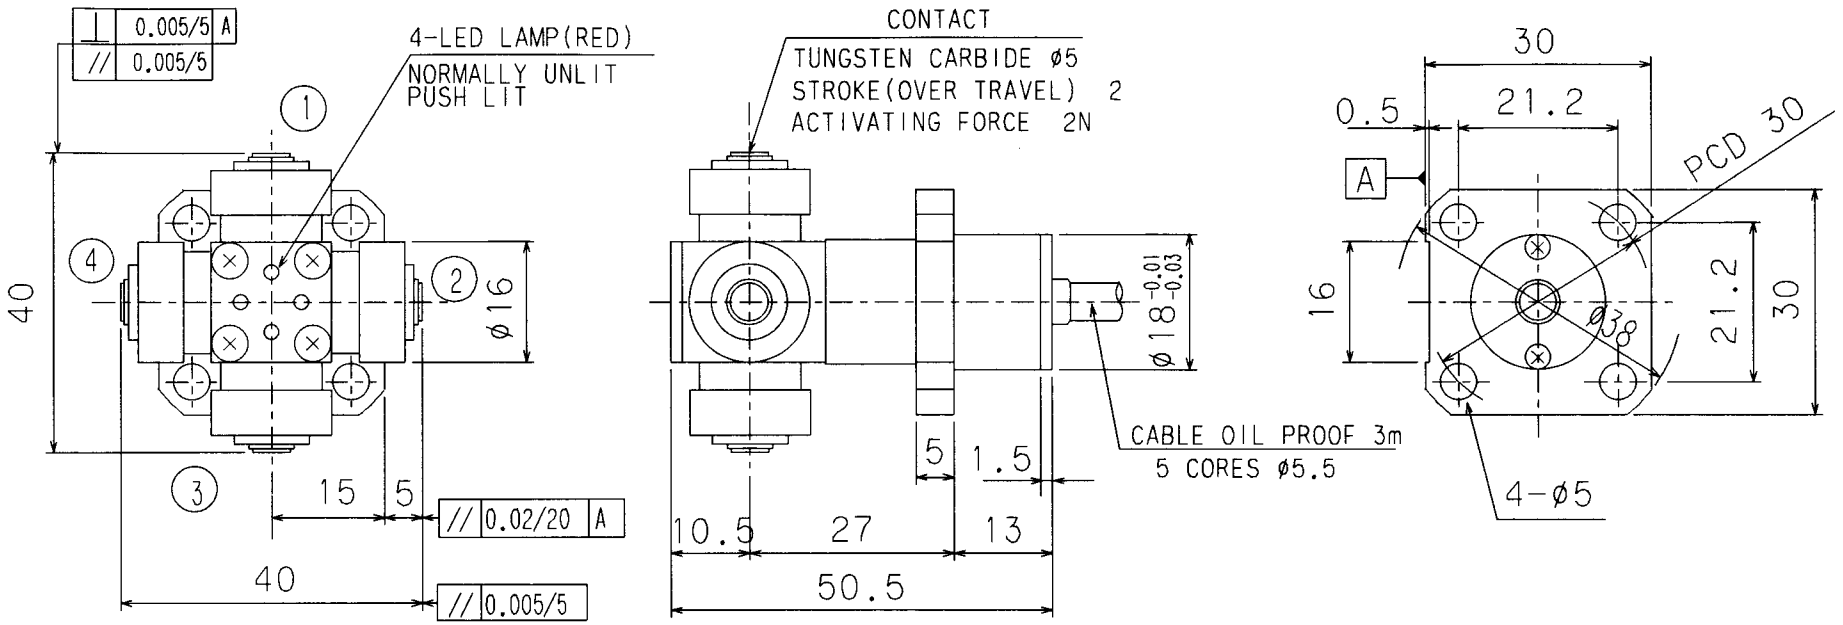


REPEATABILITY OF SKIP SIGNAL : 0.001mm

RECOMMENDED OPERATING SPEED : 50~200mm/min

CONTACT RATING : DC24V 10mA

DEGREES OF PROTECTION : IEC IP67

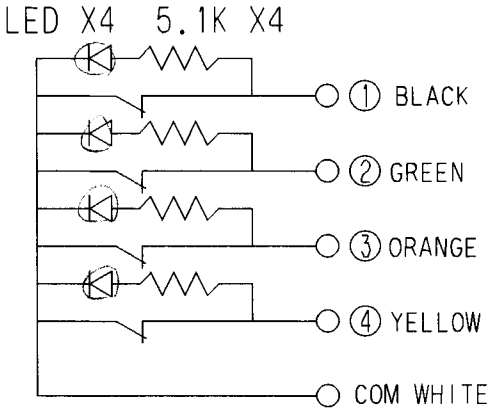

SET NUMBER H4A-12-63S

COMPOSITION
- SENSOR HEAD H4A-12-63
- POLARITY CONVERTOR UNIT BA-4A

APR	CHK	DRA
	K.EBINA	01.10.18 HIJIKATA

1/1

NAME	TOOL SETTING PROBE
DRAWING NUMBER	H4A-12-63S

METROL LTD. METROL

¥H4A12 ENG¥4A1263SE