

REPEATABILITY OF SKIP SIGNAL : 0.001mm

OPERATING SPEED 5m/min.MAX
50~200mm/min.RECOMMENDED.

CONTACT RATING : DC12~24V 20mA(Max)
(RECOMMENDED 10mA) NON-INDUCTIVE LOAD

DEGREES OF PROTECTION : IEC IP67

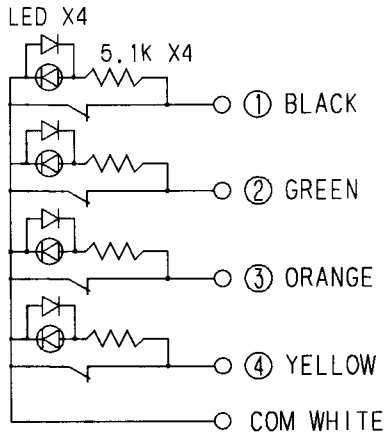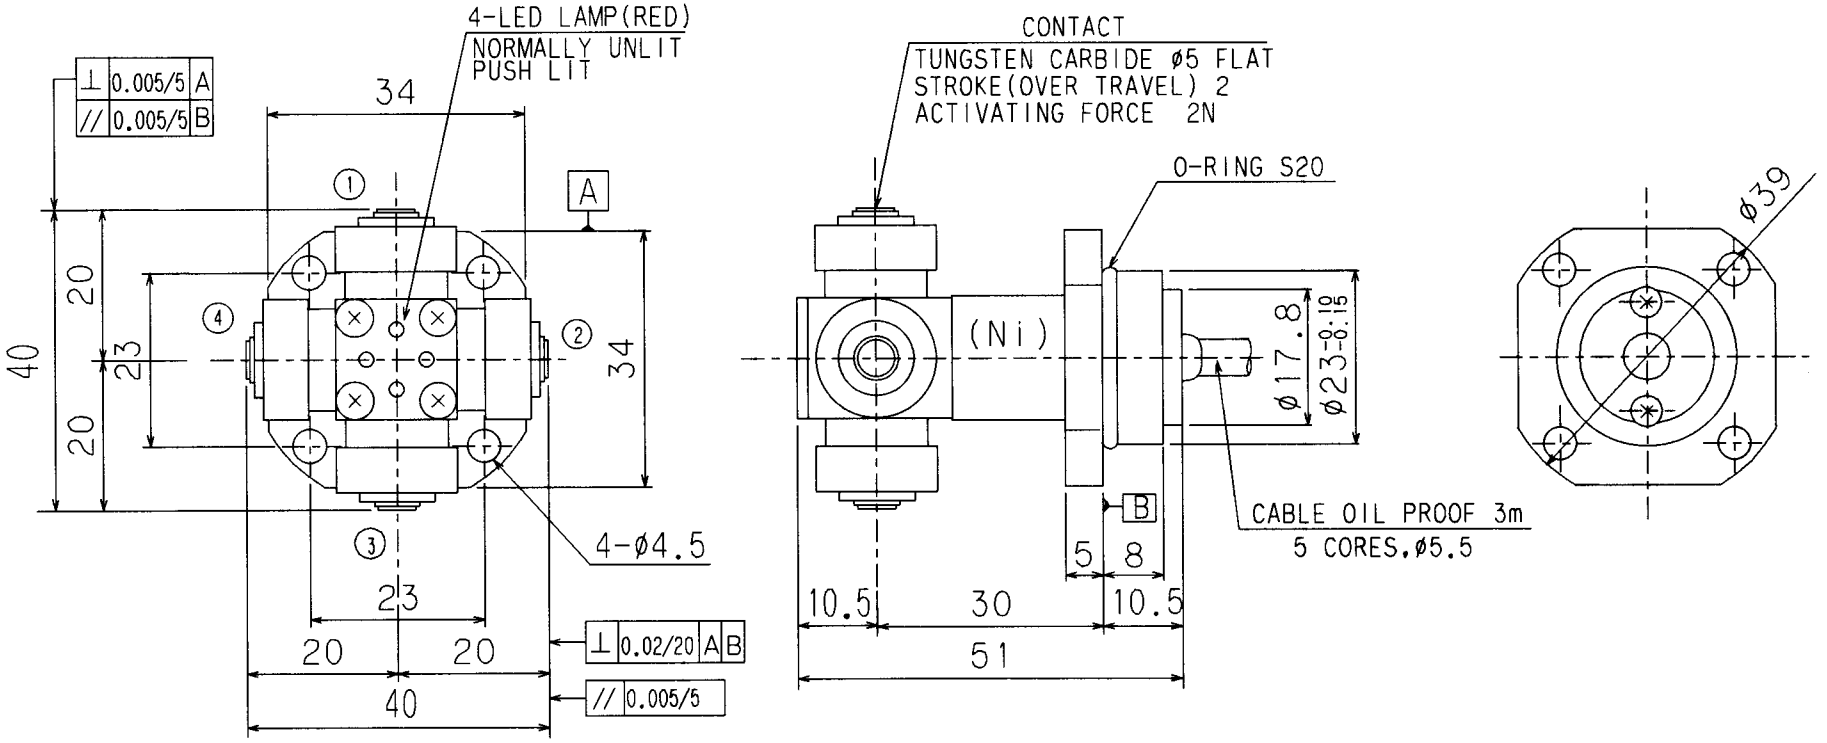


| | | | | NAME | TOOL SETTING PROBE |
|---|---|---|---|---|---|
| APR | CHK | DRA | | DRAWING NUMBER | H4A-18-34 |
| | K.EBINA | 01.11.13 HIJIKATA | 1/1 | METROL LTD. | METROL |

¥H4A18¥4A1834E