
OPERATING MODE: NC(NORMALLY CLOSE)
REPEATABILITY : 0.001mm
(OPERATING SPEED:50~200mm/min)
RATING : DC24V 20mA(Max)
(RECOMMENDED VALUE 10mA)NON-INDUCTIVE LOAD
DEGREE OF PROTECTION : IEC IP67

SET : H4A-18-39S

COMPOSITION
- SENSOR HEAD H4A-18-39H
- EXTENSION CABLE CB5-5.4
- LEVEL CONVERSION UNIT BA-4A

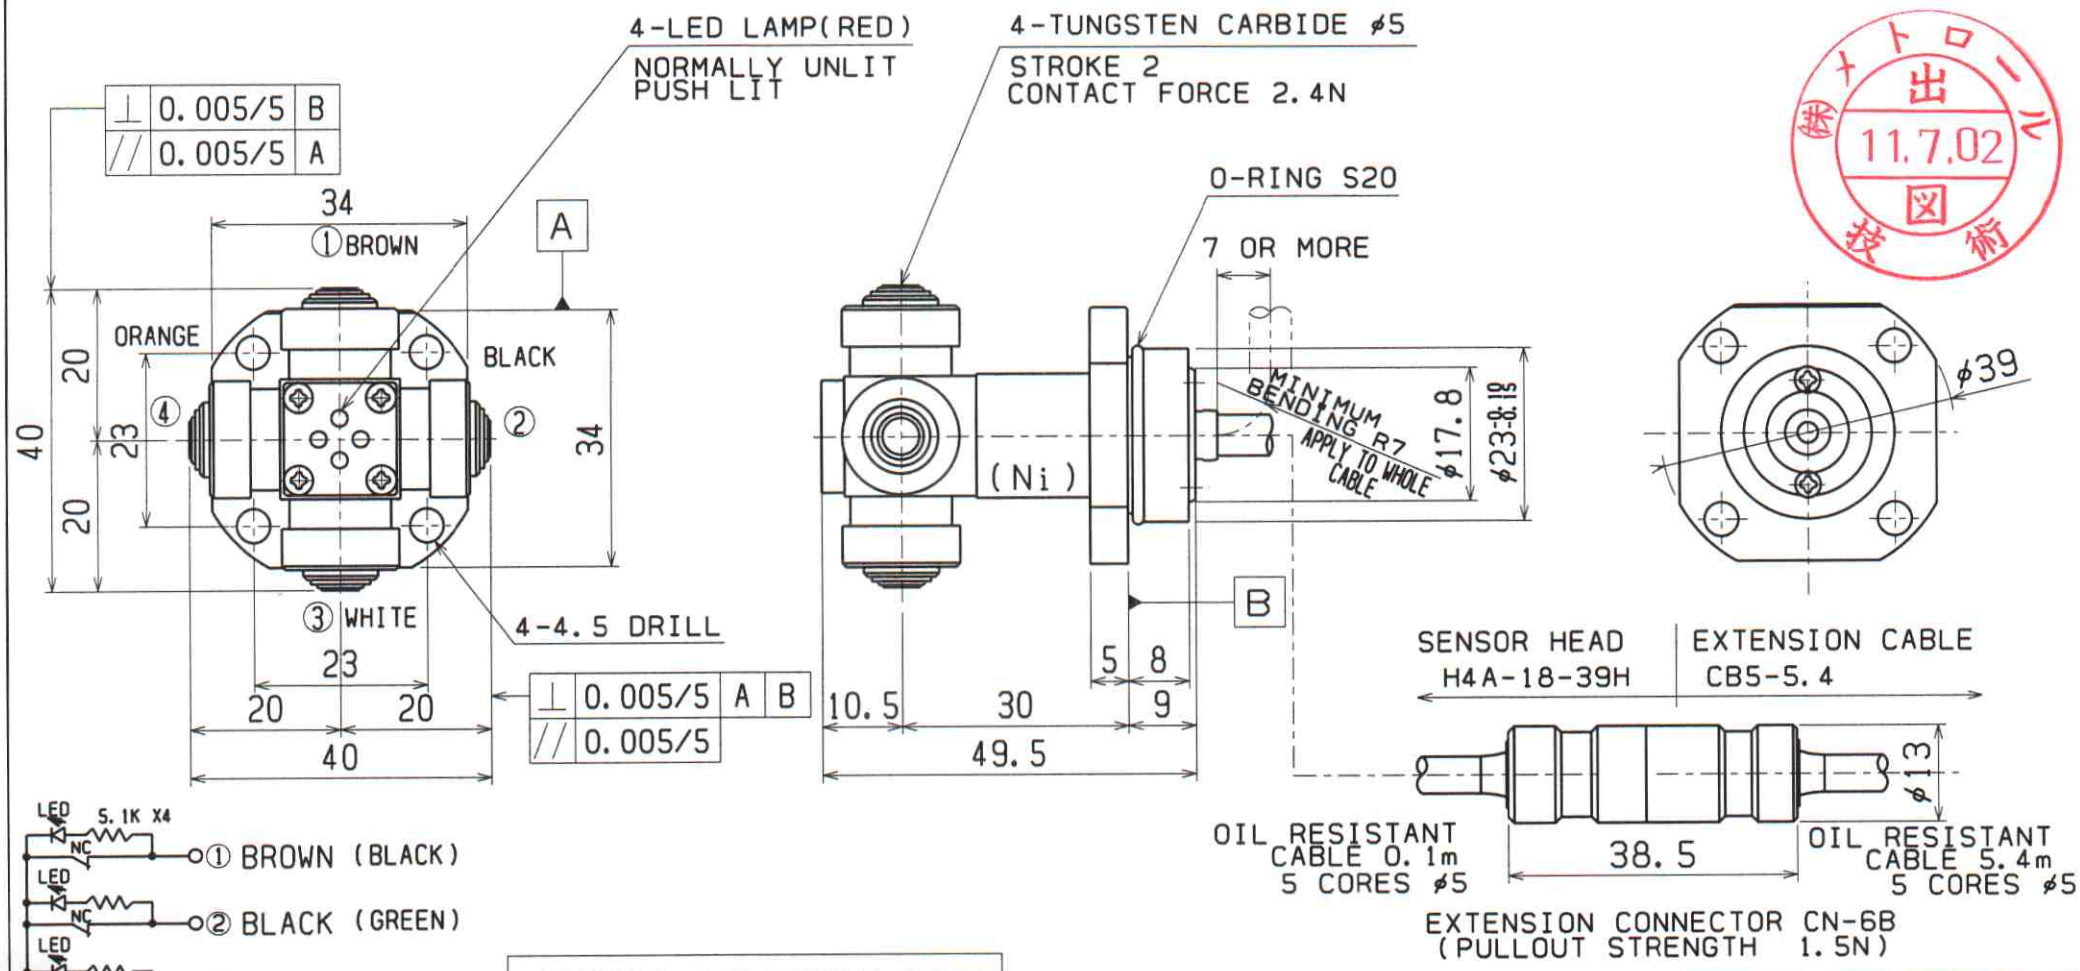

MODIFIED THE WIRING COLOR
IN NOVEMBER, 1998
( ) SHOWS OLD WIRING COLOR

出 11.7.02 図
メトロール 技術

			NAME	TOOL SETTING PROBE
CHK	DRA	A4	DRAWING NUMBER	H4A-18-39S
	REV08.07.04 KUZUO	1 : 1	METROL CO.,LTD.	METROL

REV 08.07.04
DRA 01.04.24

H4A¥ENG¥4A1839E.FXD