
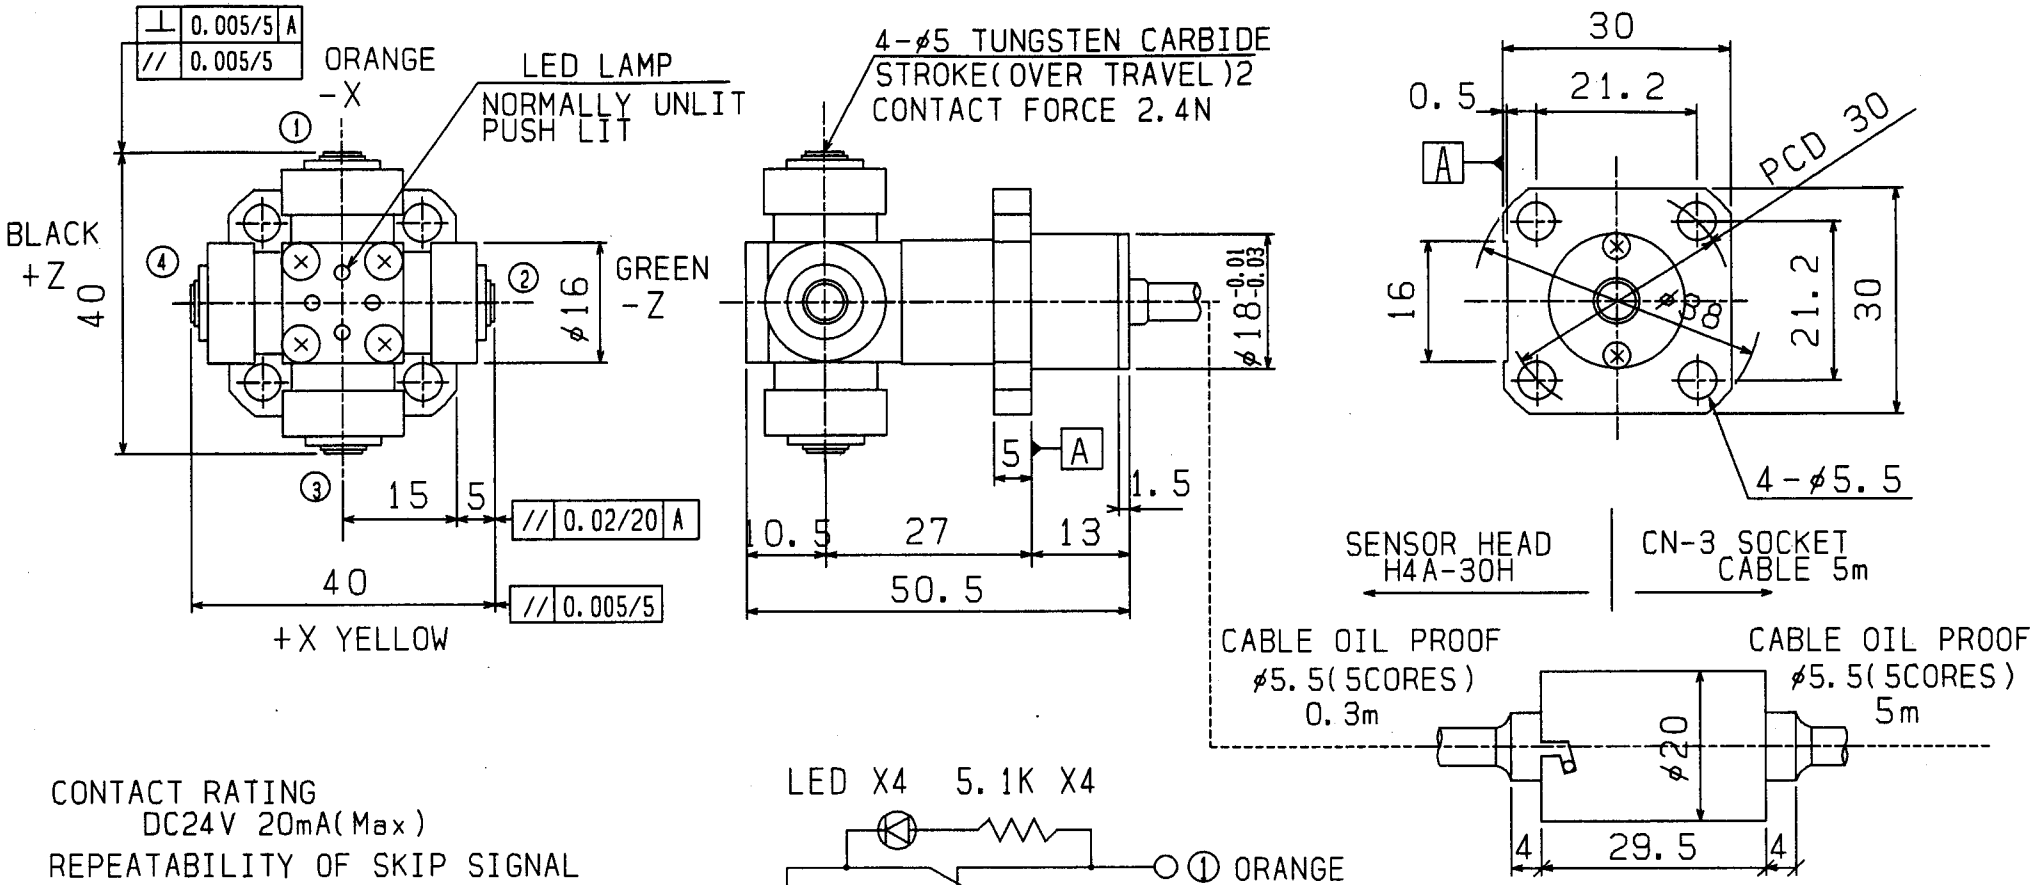


CONTACT RATING
DC24V 20mA(Max)

REPEATABILITY OF SKIP SIGNAL
0.001mm

DEGREES OF PROTECTION
IEC IP67

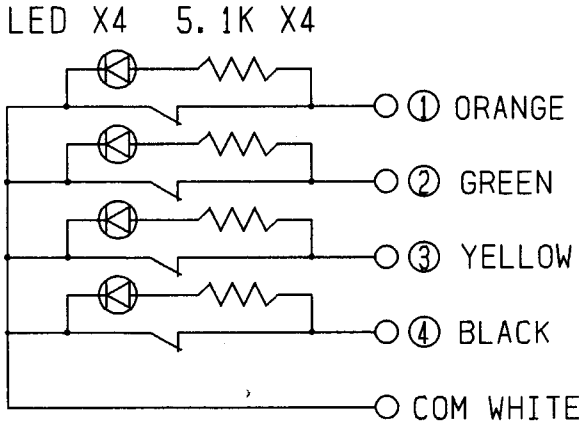

SET NUMBER: H4A-30

COMPOSITION
- SENSOR HEAD H4A-30H
- CN-3 SOCKET CABLE 5m
- POLARITY CONVERTOR UNIT BA-4A

			A4 1/1	NAME	TOOL SETTING PROBE
APR	CHK	DRA		DRAWING NUMBER	H4A-30S
	K.EBINA	01.6.1 HIJIKATA		METROL LTD	METROL. LTD

¥H4A¥4A30E